

FIG. 1





[illegible]

F16. 4

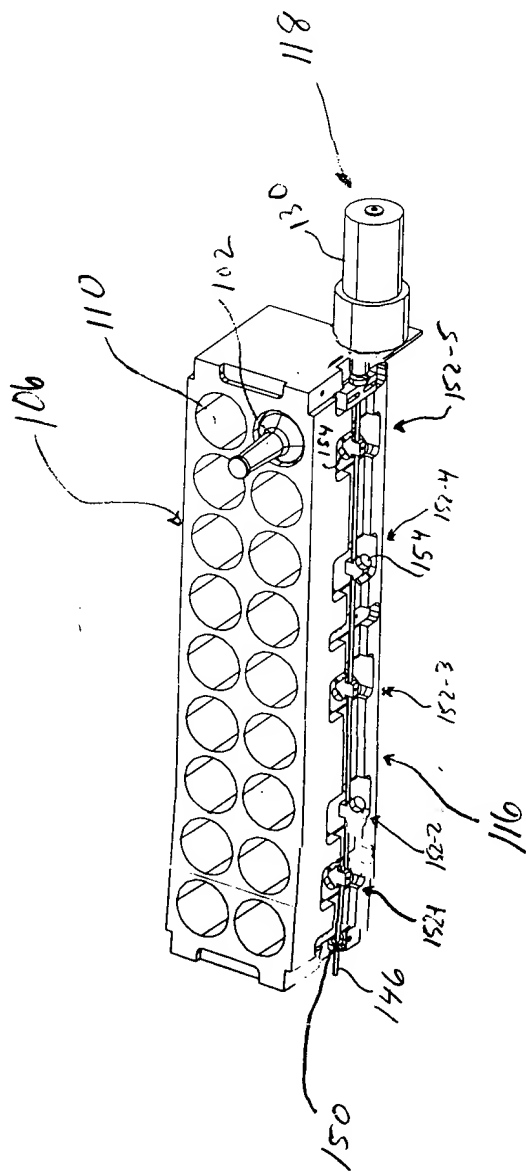


FIG. 5

FIG. 6 is a perspective view of the device 100 in a closed position. The device 100 includes a handle 102, a body 104, and a latch 106. The handle 102 is connected to the body 104 by a hinge 108. The latch 106 is located on the body 104 and is used to lock the device 100 in a closed position. The device 100 is shown in a closed position, with the handle 102 rotated towards the body 104.

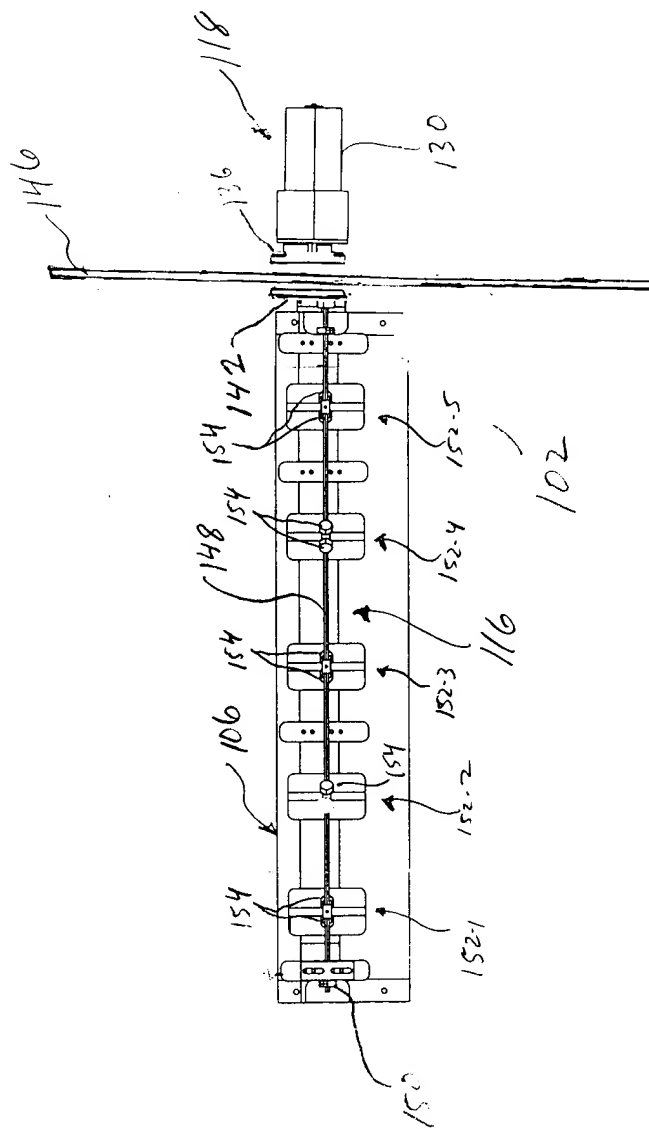


FIG. 6


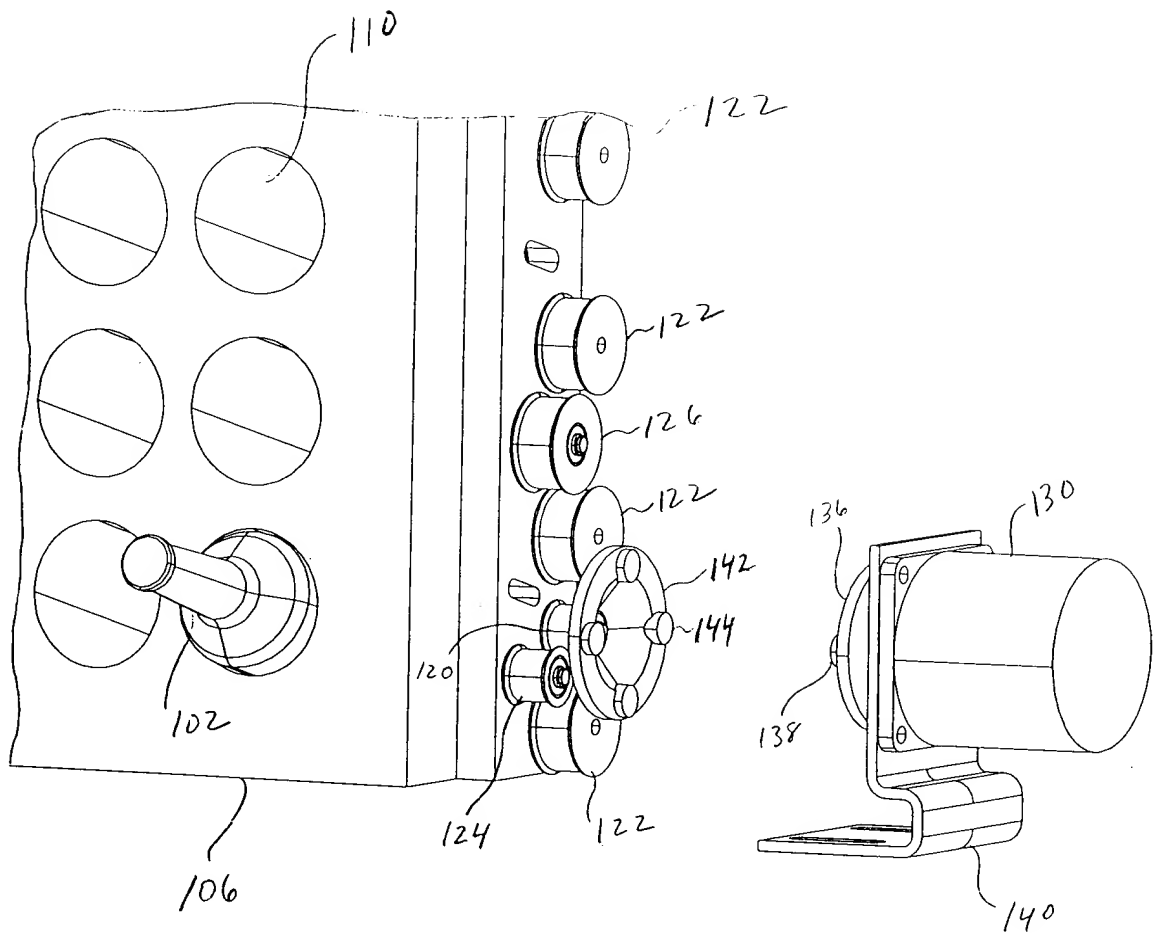


FIG. 7

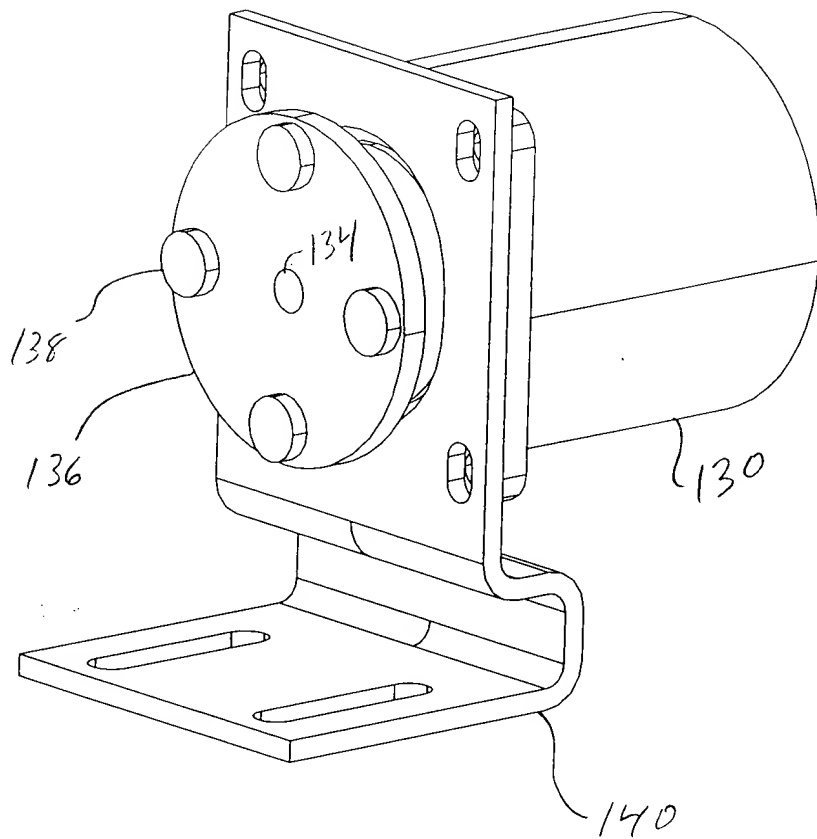

F16. 8



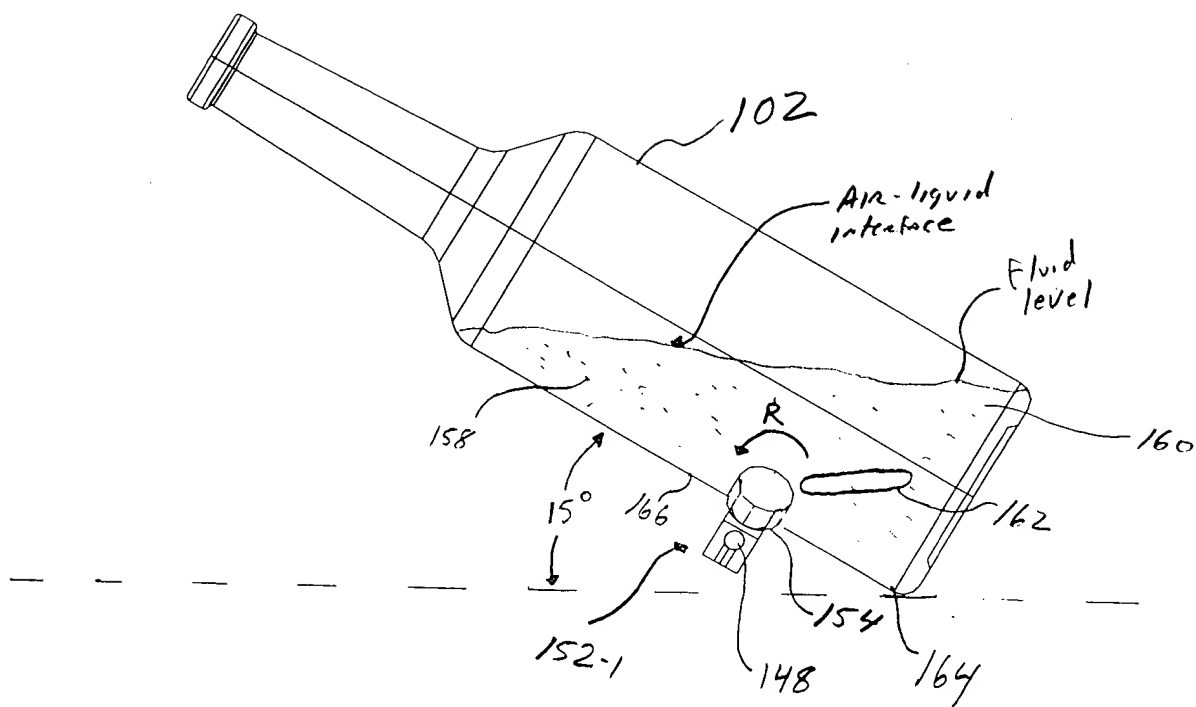


FIG. 9

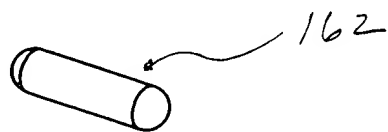


FIG. 10

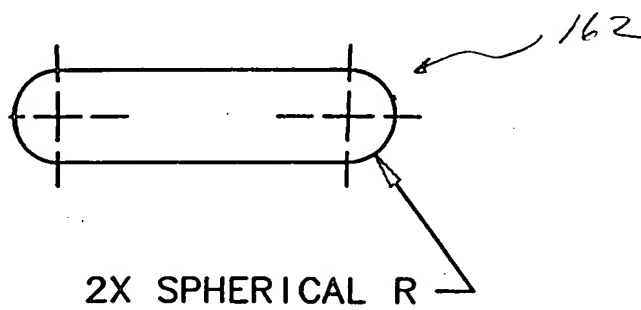


FIG. 11

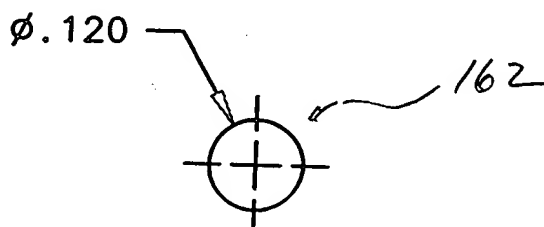


FIG. 12

TOP SECRET